

Badotherm capsule pressure gauge model BDT9-18 is available in standard ranges from 16mbar up to 600 mbar. The gauges are suitable for corrosive environments and gaseous media that will attack copper alloys. This pressure gauge is typically used for applications in the chemical, petro-chemical, oil & gas, power and utilities, machine building and general process industries



DESIGN INFORMATION

DESIGN NORM EN 837-3	INGRESS PROTECTION IP54 per IEC 60529
--------------------------------	---

STANDARD MODEL MATERIAL SPECIFICATIONS

PROCESS CONNECTION AISI 316(L)	CAPSULE AISI 316	CASE AISI 304, bayonet	BEZEL AISI 304, bayonet
MOVEMENT stainless steel	WINDOW glass	POINTER aluminium, black	DIAL aluminium, white with black markings

TECHNICAL SPECIFICATIONS

	63 mm	100 mm	160 mm
Connection	1/4" BSP/NPT	1/2" BSP/NPT	1/2" BSP/NPT
Minimum range	16 mbar	16 mbar	16 mbar
Maximum range	600 mbar	600 mbar	600 mbar
Accuracy	1.6% FSV	1.6% FSV	1.6% FSV
Pointer	adjustable slotted	adjustable slotted	adjustable slotted
Mounting variations	A / B / C / D / E	A / B / C / D / E	A / B / C / D / E
Movement	zero adjustable	zero adjustable	zero adjustable
Free zero	•	•	•
Internal limit stop	-	-	-
Connection construction	screwed	screwed	screwed
Blow out	NBR	NBR	NBR
Compensation plug, material	NBR	NBR	NBR
Window gasket	NBR	NBR	NBR

SPECIAL EXECUTIONS

BDT9-12	brass system (capsule and movement) with stainless steel connection
BDT9-18-S	casing and bezel in AISI 316(L)

OPTIONS

WINDOW	laminated safety glass or plastic
PROCESS CONNECTION	other
RESTRICTOR SCREW	AISI 316(L)
CLEANING	oxygen service
CALIBRATION CERTIFICATES	5 points (rising and falling)
ACCESSORIES	please check for matching accessories such as siphons (BDT42), snubbers (BDT45), swivel gauges (BDT47), overpressure protectors (BDT49), diaphragm seals and instrument needle valves and manifolds

PRESSURE DETAILS

WORKING PRESSURE

steady	full scale value
fluctuating	0.9 x full scale value

TEMPERATURE DETAILS

CASE FILLING FLUID			WINDOW		GASKETS		
	ambient	process		ambient		ambient	
-	without	-40°C to 60°C	100°C	glass	<400°C	window NBR	<100°C
				safety glass	<200°C	fill plug NBR	<100°C
				polycarbonate	<120°C	fill plug HNBR	<150°C


TEMPERATURE EFFECT

The variation of indication caused by the effect of temperature shall not exceed:
 $\pm 0.08 \times (\text{ambient temperature} - \text{reference temperature})\% \text{ of the span}$

MOUNTING VARIATIONS

- type A bottom connection, direct mounting
- type B back connection, panel mounting, clamp fixing
- type C bottom connection, surface mounting
- type D back connection, direct mounting
- type E back connection, panel mounting

DRAWINGS

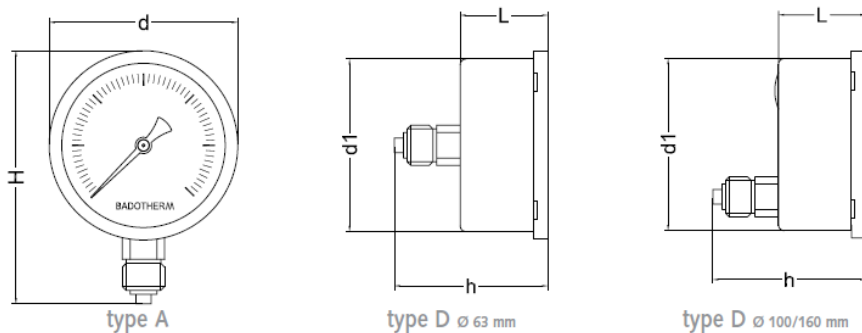

DIMENSIONS

ns	d	d1	L	H	h	weight
63	68	63	42	88	63	0.18 kg
100	110	100	49	142	82	0.53 kg
160	160	149	50	200	84	1.02 kg

All dimensions in mm



Holland – United Kingdom – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only.

Badotherm reserves the right to make changes to the specifications and materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2016 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.